

ENVIRONMENTAL PRODUCT DECLARATION

In accordance with ISO 14025 and EN 15804+A2 

Secil - Companhia Geral de Cal e Cimento **CEM I 42.5R PORTLAND CEMENT**



Owner of the declaration

Secil - Companhia Geral de Cal e Cimento
Estrada do Outão, s/n
2901-864 Setúbal
Portugal

Product

CEM I 42.5R PORTLAND CEMENT

Declared product / Declared unit

1 t of CEM I 42.5R PORTLAND CEMENT

This declaration is based on Product Category Rules

EN 15804:2012 + A2:2019,
EN 16908:2017+A1:2022: Cement and building lime - Environmental product declarations - Product category rules complementary to EN 15804

Program operator:

EPD Norway
Majorstuen P.O. Box 5250
N-0303 Oslo
Norway

Declaration number

NEPD-10063-10063-2

Registration number

NEPD-10063-10063-2

Issue date

27.03.2025

Valid to

26.03.2030

EPD Software

Emidat EPD Tool v1.0.0

General Information

Product

CEM I 42.5R PORTLAND CEMENT

Program Operator

EPD Norway
Majorstuen P.O. Box 5250
N-0303 Oslo
Norway
Phone: +47 23 08 80 00
Email: post@epd-norge.no

Declaration Number

NEPD-10063-10063-2

This declaration is based on Product Category Rules

EN 15804:2012 + A2:2019,
EN 16908:2017+A1:2022: Cement and building lime -
Environmental product declarations - Product category
rules complementary to EN 15804

Statements

The owner of the declaration shall be liable for the
underlying information and evidence. EPD Norway shall
not be liable with respect to manufacturer, life cycle
assessment data and evidences.

Declared unit

1 t of CEM I 42.5R PORTLAND CEMENT

General information on verification of EPD from EPD tools

Independent verification of data, other environmental
information and the declaration according to ISO
14025:2010, § 8.1.3 and § 8.1.4. Verification of each EPD
is made according to EPD Norway's guidelines for
verification and approval requiring that tools are i)
integrated into the company's environmental
management system, ii) the procedures for use of the
EPD tool are approved by EPD-Norway, and iii) the
process is reviewed annually by an independent third
party verifier. See Appendix G of EPD-Norway's General
Programme Instructions for further information on EPD
tools.

Verification of EPD tool

Charlotte Merlin, FORCE Technology
(no signature required)

Owner of the declaration

Secil - Companhia Geral de Cal e Cimento

Contact person

daniela.faisca@secil.pt

Phone

+351217927100

Email

daniela.faisca@secil.pt

Manufacturer

Secil - Companhia Geral de Cal e Cimento
Estrada do Outão, s/n
2901-864 Setúbal, Portugal

Place of production

Setúbal, Portugal

Management system

ISO 9001, ISO 14001, ISO 45001, EMAS

Organisation no

23510

Issue date

27.03.2025

Valid to

26.03.2030

Year of study

2022

Comparability

EPDs of construction products may not be comparable if
they do not comply with EN 15804 and are not seen in a
building context. EPD data may not be comparable if the
datasets used are not developed in accordance with EN
15804 and if the background systems are not based on
the same database (including primary and secondary
data).

Development and verification of EPD

The declaration was created using the Emidat EPD tool
v1.0, developed by Emidat GmbH. The EPD tool has been
approved by EPD Norway.

Developer of EPD: Daniela Faisca

Reviewer of company-specific input data and EPD:
Raquel Sofia Venâncio Madeira do Nascimento Paulo

Approved



Håkon Hauan, CEO EPD-Norge

Product

Product description

CEM I 42.5R Portland cement is a high-performance cement produced mainly from Portland clinker - with an average composition of 5%-100% clinker and 0%-5% other components in accordance with NP EN 197-1:2012. The clinker comes from Secil Outão.

The cement does not contain any substance included on the Candidate List of Substances of Very High Concern (SVHC) above the limit for registration with the European Chemicals Agency, i.e. above 0.1 per cent (m/m).



CEM I 42.5R Portland Cement is a high quality, high performance product, widely used in civil engineering works and in the manufacture of high and very high resistance concrete. It is particularly suited to works where a very high resistance is required on the first days after application.

The main applications of this cement are:

- ready-mixed or cast in-situ high and very high initial or final resistance concrete;
- high resistance lightweight concrete;
- early prestressed concrete;
- concrete cast in cold weather;
- prestressed lightweight and heavyweight prefabrication with high turnover of moulds and formwork;
- sealing and grouting

Product specification

Name of ingredient	Share of total weight	Country of origin
Additives	0 - 6 %	Portugal
Additives	0 - 6 %	Spain
Clinker	80 - 100 %	Portugal
Fillers	0 - 6 %	Portugal
Gypsum	6 - 20 %	Portugal
Natural aggregates	0 - 6 %	Portugal

Technical data

	Unit	Value
Compressive Strength (Prisms, EN 196-1)	N / mm ²	42.5
Density	kg / m ³	1238.0

Market

Portugal

Reference service life


This study does not cover the use stage. Thus, the reference service life is irrelevant.

LCA: Calculation rules

Declared unit

1 t of CEM I 42.5R PORTLAND CEMENT

System boundary

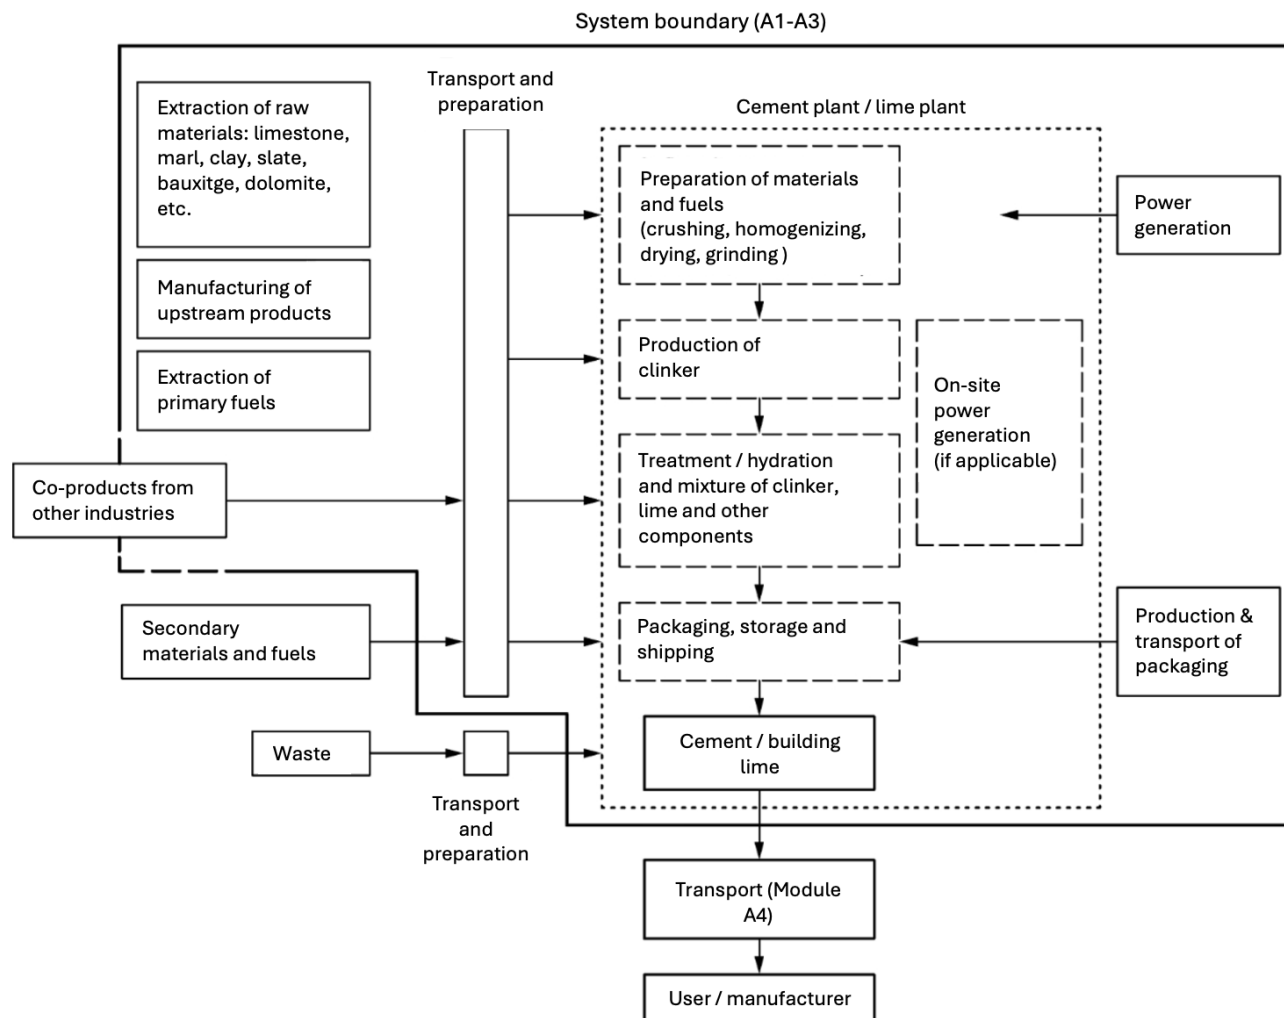

Data quality

The Emidat EPD Tool v1.0.0 was used for LCA modeling and calculation. Background data was used from ecoinvent database v3.10.

System boundaries (X=included, MND=module not declared)

	Production			Installation		Use stage							End-of-Life				Next product system
	Raw material supply	Transport	Manufacturing	Transport	Installation Process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational Energy Use	Operational Water Use	Demolition	Transport	Waste Processing	Disposal	Benefits and loads beyond the system boundary
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	x	x	x	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND
Geography			PT	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND

For the geographies modeled in A1 and A2, refer to *Product specification*.

Type of EPD: cradle to gate (A1-A3)

Stage of Material Production and Construction

Module A1: Extraction and processing of cement raw materials

Module A2: Transportation of raw materials to the cement plant

Module A3: Cement production at the plant and waste treatment

Cut-off criteria

No cut-offs were applied.

Allocation

Elementary flows (energy and fuels, ancillary materials and waste) data was collected on production-process-level. Using the total output of the production process in 2022, elementary flows are assigned to 1 declared unit based on mass.

LCA: Results

Core environmental impact indicators

Indicator	Unit	A1-3
GWP-total	kg CO ₂ -eq.	8.08e+02
GWP-fossil	kg CO ₂ -eq.	8.07e+02
GWP-biogenic	kg CO ₂ -eq.	1.43e-01
GWP-luluc	kg CO ₂ -eq.	5.95e-01
ODP	kg CFC-11-Eq	1.33e-05
AP	mol H ⁺ -Eq	1.35e+00
EP-freshwater	kg P-Eq	8.27e-03
EP-marine	kg N-Eq	3.19e-02
EP-terrestrial	mol N-Eq	5.00e+00
POCP	kg NMVOC-Eq	1.37e+00
ADPE	kg Sb-Eq	2.46e-03
ADPF	MJ, net calorific value	3.34e+03
WDP	m ³ world Eq deprived	2.59e+01

GWP-total: Global Warming Potential - total **GWP-fossil:** Global warming potential - fossil **GWP-biogenic:** Global Warming Potential - biogenic **GWP-luluc:** Global Warming Potential - luluc **ODP:** Depletion potential of the stratospheric ozone layer **AP:** Acidification potential, Accumulated Exceedance **EP-freshwater:** Eutrophication potential - freshwater **EP-marine:** Eutrophication potential - marine **EP-terrestrial:** Eutrophication potential - terrestrial **POCP:** Photochemical Ozone Creation Potential **ADPE:** Abiotic depletion potential - non-fossil resources **ADPF:** Abiotic depletion potential - fossil resources **WDP:** Water (user) deprivation potential

Additional indicators

Indicator	Unit	A1-3
PM	disease incidence	1.74e-05
IRP	kBq U235-Eq	5.04e+00
ETP-fw	CTUe	1.05e+02
HTP-c	CTUh	9.95e-07
HTP-nc	CTUh	1.43e-05
SQP	dimensionless	1.49e+03

PM: Potential incidence of disease due to PM emissions **IRP:** Potential Human exposure efficiency relative to U235 **ETP-fw:** Potential Comparative Toxic Unit for ecosystems **HTP-c:** Potential Comparative Toxic Unit for humans - cancer effects **HTP-nc:** Potential Comparative Toxic Unit for humans - non-cancer effects **SQP:** Potential Soil quality index

IRP: This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

ETP-fw, HTP-c, HTP-nc and SQP: The results of these environmental impact indicators shall be used with care as the uncertainties on the results are high or as there is limited experienced with these indicators.

Use of resources

Indicator	Unit	A1-3
PERE	MJ	1.37e+03
PERM	MJ	0
PERT	MJ	1.37e+03
PENRE	MJ	3.34e+03
PENRM	MJ	5.76e-03
PENRT	MJ	3.34e+03
SM	kg	7.48e+01
RSF	MJ	2.87e+02
NRSF	MJ	7.70e+02
FW	m ³	6.91e-01

PERE: Primary energy resources - renewable: use as energy carrier **PERM:** Primary energy resources - renewable: used as raw materials **PERT:** Primary energy resources - renewable: total **PENRE:** Primary energy resources - non-renewable: use as energy carrier **PENRM:** Primary energy resources - non-renewable: used as raw materials **PENRT:** Primary energy resources - non-renewable: total **SM:** Use of secondary material **RSF:** Renewable secondary fuels **NRSF:** Non-renewable secondary fuels **FW:** Net use of fresh water

Waste flows

Indicator	Unit	A1-3
HWD	kg	9.25e-01
NHWD	kg	1.24e+01
RWD	kg	2.34e-04

HWD: Hazardous waste disposed **NHWD:** Non hazardous waste disposed **RWD:** Radioactive waste disposed

Output flows

Indicator	Unit	A1-3
CRU	kg	0
MFR	kg	0
MER	kg	0
EEE	MJ	0
EET	MJ	0

CRU: Components for re-use **MFR:** Materials for recycling **MER:** Materials for energy recovery **EEE:** Exported electrical energy **EET:** Exported thermal energy

Name	Value	Unit
Biogenic carbon content in product	0	kg C
Biogenic carbon content in accompanying packaging	0	kg C

Additional requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

Electricity consumption in the manufacturing phase is composed from the sources below certified by Guarantee of Origin. Electricity is represented by data in ecoinvent 3.10 regionalised for Portugal.

Electricity	Unit	Value
Solar	kg CO ₂ -eq. / kWh	0.07
Wind	kg CO ₂ -eq. / kWh	0.04
Hydro	kg CO ₂ -eq. / kWh	0.42
Geothermal	kg CO ₂ -eq. / kWh	0.07
Bioenergy	kg CO ₂ -eq. / kWh	0.05
Gas	kg CO ₂ -eq. / kWh	0.86
Oil	kg CO ₂ -eq. / kWh	0.90

Dangerous substances

The product contains no substances given by the REACH candidate list.

Additional environmental information

Additional environmental impact indicators required in NPCR Part A for construction products

Indicator	Unit	A1-3
GWP-IOBC	kg CO ₂ -eq.	ND

GWP-IOBC: Global Warming Potential - Instantaneous oxidation of biogenic carbon

Bibliography

DIN EN ISO 14025:2011-10	Environmental labels and declarations - Type III environmental declarations - Principles and procedures
DIN EN ISO 14040:2021-02	Environmental management - Life cycle assessment - Principles and framework
DIN EN ISO 14044:2021-02	Environmental management - Life cycle assessment - Requirements and guidelines
EN 15804:2012+A2:2019	Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products
DIN CENTR 15941:2010-11	Sustainability of construction works - Environmental product declarations - Methodology for selection and use of generic data
DIN EN 15942:2022-04	Sustainability of construction works - Environmental product declarations - Communication format business-to-business
ISO 21930:2017-07	Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products and services
Ecoinvent v3.10	ecoinvent, Zurich, Switzerland, database version 3.10
PCR	EN 16908:2017+A1:2022: Cement and building lime - Environmental product declarations - Product category rules complementary to EN 15804
EN 16908:2017+A1:2022	Cement and building lime - Environmental product declarations - Product category rules complementary to EN 15804
	Basic principles and recommendations for describing the dismantling, post use, and disposal stage of construction products: https://www.umweltbundesamt.de/sites/default/files/medien/1410/publikationen/2020-07-06_texte_130-2020_guidance-document-construction-industry.pdf
	ILCD Handbook: https://eplca.jrc.ec.europa.eu/uploads/ILCD-Handbook-LCIA-Background-analysis-online-12March2010.pdf

	Program Operator	Phone	+47 23 08 80 00
	EPD Norway Majorstuen P.O. Box 5250, N-0303 Oslo Norway	Email	post@epd-norge.no
	Publisher	Web	www.epd-norge.no
	The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo Norway	Phone	+47 23 08 80 00
	Owner of the declaration	Email	post@epd-norge.no
	Secil - Companhia Geral de Cal e Cimento Estrada do Outão, s/n, 2901-864 Setúbal Portugal	Web	www.epd-norge.no
	Author of the life cycle assesment	Phone	+351217927100
	Secil - Companhia Geral de Cal e Cimento Estrada do Outão, s/n, 2901-864 Setúbal Portugal	Email	daniela.faisca@secil.pt
	ECO Platform ECO Portal	Web	https://www.secil.pt/pt/Home
		Web	www.eco-platform.org
	Developer of EPD generator	Web	ECO Portal
	Emidat GmbH Sandstraße 33, 80335 München Germany	Phone	+49 176 56 96 77 91
		Email	epd@emidat.com
		Web	www.emidat.com